

## Zirkon® FTG

Kuntze sensors stand for quality and are manufactured by our own production. Made in Germany.

Flow and temperature are monitored by Zirkon® FTG while measuring disinfectants in our assembly Argon® Stabiflow. Additionally it can be used as ground.

### Advantages

- > Brine resistant
- > Fast response times
- > Chemical resistant

### Measuring Parameter

- > Temperature: -5,0...70,0 °C

### Process Conditions

- > Max. Pressure: < 6 bar at 20 °C
- > Temperature: 0,0...50,0 °C

### Mechanical Construction


- > Shaft Material: Stainless Steel, 1.4404
- > Shaft Length: 35 mm
- > Process Connection:  
Fixed Cable, 1 m (Fast Coupling)
- > Electrical Connection: 3-wire Pt 100
- > Temperature Sensor: Pt 100

Article No.: 24137001K

### Zirkon® FTG



### Mechanical Drawing

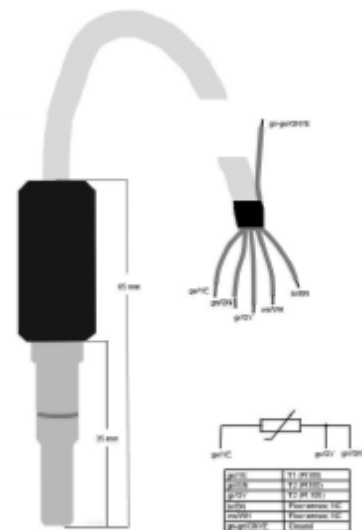

Zirkon® FTG  
24137001K



**Kuntze Instruments GmbH**

Robert-Bosch-Str. 7a  
40688 Meerbusch  
Germany

+49 2150 70660  
info@kuntze.com  
www.kuntze.com