

Zirkon[®] DIS

Kuntze sensors stand for quality and are manufactured by our own production. Made in Germany.

Zirkon[®] DIS is a potentiostatic sensor using an amperometric measurement. Measurement parameter and range are selected in the analyzer software.

Advantages

- > Automatic cleaning by ASR[®] possible
- > Low maintenance due to gel filling
- > Stable zeropoint
- > High quality Zirkon junction for reliable measurement results

Measuring Parameter

- > Hydrogen Peroxide: up to 30,00 mg/l

Process Conditions

- > Max. Pressure: < 10 bar at 20 °C
- > Temperature: -5...+70 °C

Mechanical Construction

- > Junction: Zirkon
- > Shaft Material: Glass
- > Shaft Length: 120 mm
- > Shaft Diameter: 12 mm
- > Electrode Material: 2 Platinum Rings
- > Reference System: Ag / AgCl / Tepox Gel
- > Process Connection: M12 Plug (Swivel PG 13.5)
- > Electrical Connection: 6 Poles


Article No.: **S24135260K**

Order Code: **231712500**

Zirkon[®] DIS



Mechanical Drawing

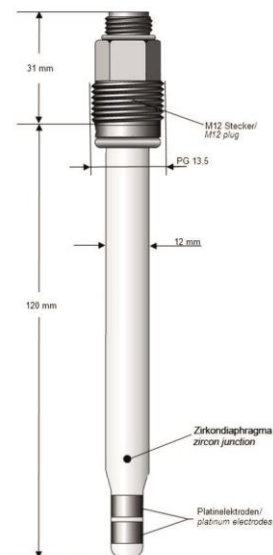



Kuntze Instruments GmbH

Robert-Bosch-Str. 7a
40688 Meerbusch
Germany

+49 2150 70660
info@kuntze.com
www.kuntze.com