

## Zirkon® DIS Pool

Kuntze sensors stand for quality and are manufactured by our own production. Made in Germany.

Zirkon® DIS Pool is a potentiostatic sensor using an amperometric measurement. Measurement parameter and range are selected in the analyzer software.

### Advantages

- > Low maintenance due to gel filling
- > Stable zeropoint
- > High quality Zirkon junction for reliable asurement results

### Measuring Parameter

- > Hydrogen Peroxide: bis zu 30,00 mg/l

### Process Conditions

- > Max. Pressure: < 10 bar at 20 °C
- > Temperature: -5...+70 °C

### Mechanical Construction


- > Junction: Zirkon
- > Shaft Material: Glass
- > Shaft Length: 170 mm
- > Shaft Diameter: 12 mm
- > Electrode Material:  
Platinum Ring + Platinum Plate
- > Reference System: Ag / AgCl / saturated KCl
- > Process Connection:  
Flange Plug (Swivel PG 13.5)
- > Electrical Connection: 6 Poles

**Article No.:** S24135155K  
**Order Code:** 237913990

### Zirkon® DIS Pool



### Mechanical Drawing

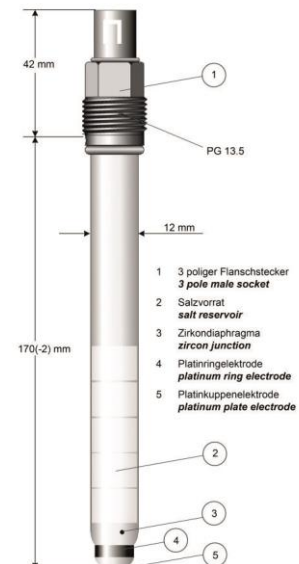



**Kuntze Instruments GmbH**  
Robert-Bosch-Str. 7a  
40688 Meerbusch  
Germany

+49 2150 70660  
info@kuntze.com  
www.kuntze.com