

## Zirkon® Redox Wide Body

Kuntze sensors stand for quality and are manufactured by our own production. Made in Germany.

**Article No.: S24136511K**  
**Order Code: 2191100010**

### Application

- > Flotation
- > Leaching
- > Neutralization
- > Outlet monitoring

### Advantages

- > Annular junction, designed to withstand tough industrial applications
- > Threaded connection 3/4" NPT top and bottom for easy installation
- > Protection guard against electrode damage
- > Rugged Ryton® shaft for demanding chemical environments

### Measuring Parameter

- > Redox Potential (ORP): -1500.. +1500 mV

### Process Conditions

- > Max. Pressure: < 10 bar at 20 °C / 68 °F
- > Min. Conductivity: > 50 µS/cm
- > Temperature: -5..+110 °C / 23...230 °F


### Mechanical Construction

- > Junction: PTFE
- > Shaft Material: Ryton®
- > Shaft Length: 150 mm with protective guard
- > Shaft Diameter: Hexagon 26 mm
- > Electrode Material: Platinum Plate
- > Reference System: Ag / AgCl / Solid electrolyte
- > Process Connection: 3/4" NPT
- > Electrical Connection: S8 (2 Poles)
- > Temperature Sensor: Non
- > Installation Depth: 25 mm
- > Potential Compensation: Non



Zirkon® Redox Wide Body

### Mechanical Drawing

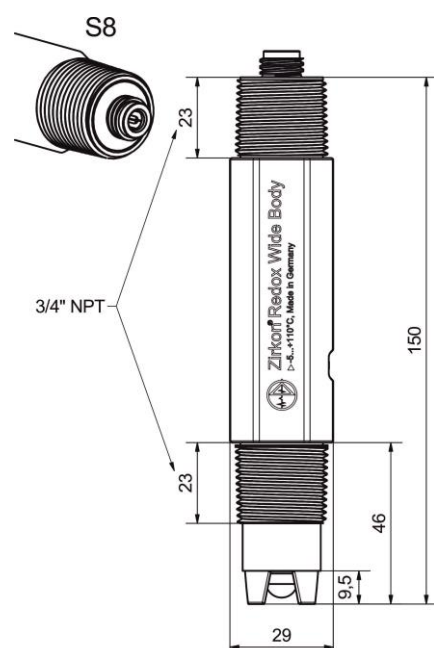



**Kuntze Instruments GmbH**  
Robert-Bosch-Str. 7a  
40688 Meerbusch  
Germany

+49 2150 70660  
[info@kuntze.com](mailto:info@kuntze.com)  
[www.kuntze.com](http://www.kuntze.com)