

## Zirkon® pH Coating

Kuntze sensors stand for quality and are manufactured by our own production. Made in Germany.

Zirkon® pH Coating is specifically developed for the use in the lacquer industry or in fluoride containing media.

### Advantages

- > High quality Zirkon junction for reliable measurement results
- > Long service life due to refillable reference electrode
- > Protectable junction
- > Fluoride resistant
- > According to DIN 55659 for pH measurement in ETL lacquers

### Measuring Parameter

- > pH-Value: pH 0...11

### Process Conditions

- > Max. Pressure: < 1 bar at 20 °C
- > Min. Conductivity: > 50 µS/cm
- > Temperature: 0...+60 °C

### Mechanical Construction


- > Junction: Zirkon (15 mm protruding)
- > Shaft Material: Glass
- > Shaft Length: 160 mm
- > Shaft Diameter: 12 mm
- > Electrode Material: SF-Glass-Ball
- > Reference System: Ag / AgCl / 3M KCl
- > Process Connection: S7 Plug
- > Electrical Connection: 2 Poles
- > Temperature Sensor: None
- > Installation Depth: 154 mm
- > Potential Compensation: None

**Article No.:** S24132320K  
**Order Code:** 206051320

### Zirkon® pH Coating



### Mechanical Drawing

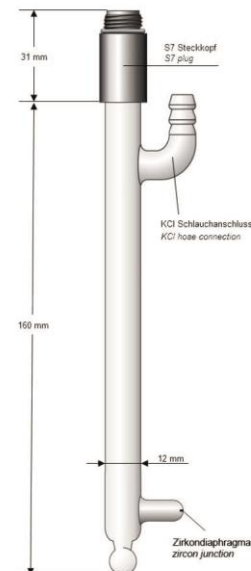



**Kuntze Instruments GmbH**

Robert-Bosch-Str. 7a  
40688 Meerbusch  
Germany

+49 2150 70660  
info@kuntze.com  
www.kuntze.com