

## Zirkon® pH Fluoride

Kuntze sensors stand for quality and are manufactured by our own production. Made in Germany.

Zirkon® pH Fluoride is a high quality sensor with a good price/performance ratio and can be used in a wide range of process and wastewater applications.

### Advantages

- > Low maintenance due to gel filling
- > High quality PTFE junction for reliable measurement results
- > Long service life
- > Good price/performance ratio

### Measuring Parameter

- > pH-Value: pH 0...11

### Process Conditions

- > Max. Pressure: < 2 bar at 20 °C
- > Min. Conductivity: > 150 µS/cm
- > Temperature: 0...+60 °C

### Mechanical Construction


- > Junction: PTFE
- > Shaft Material: Glass
- > Shaft Length: 120 mm
- > Shaft Diameter: 12 mm
- > Electrode Material: SF-Glass-Ball
- > Reference System: Ag / AgCl / Tepox Gel
- > Process Connection: S8 Plug (swivel G 13.5)
- > Electrical Connection: 2 Poles
- > Temperature Sensor: None
- > Installation Depth: 120 mm
- > Potential Compensation: None

Article No.: S24132420K  
Order Code: 205072100

### Zirkon® pH Fluoride



### Mechanical Drawing

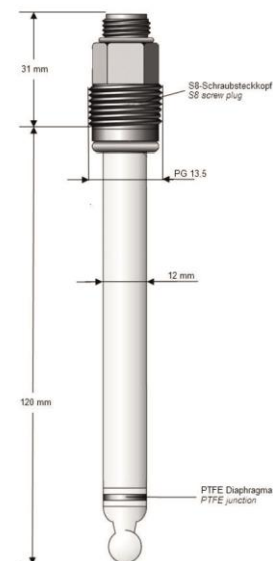



**Kuntze Instruments GmbH**

Robert-Bosch-Str. 7a  
40688 Meerbusch  
Germany

+49 2150 70660  
info@kuntze.com  
www.kuntze.com