

## Zirkon® pH Wide Body

Kuntze sensors stand for quality and are manufactured by our own production. Made in Germany.

### Application

- > Flotation
- > Leaching
- > Neutralization
- > Outlet monitoring

### Advantages

- > Annular junction, designed to withstand tough industrial applications
- > Threaded connection 3/4" NPT top and bottom for easy installation
- > Protection guard against electrode damage
- > Rugged Ryton® shaft for demanding chemical environments
- > Built in Pt 1000 sensor for temperature compensation
- > Solution ground for stable measurements in demanding application
- > Molded sensor cable with BNC plug application

### Measuring Parameter

- > pH-Value: pH 0...14

### Process Conditions

- > Max. Pressure: < 10 bar at 20 °C
- > Min. Conductivity: > 50 µS/cm
- > Temperature: -5...+110 °C

### Mechanical Construction


- > Junction: PTFE
- > Shaft Material: PPS
- > Shaft Length: 150 mm with protective guard
- > Shaft Diameter: Hexagon 26 mm
- > Electrode Material: AH-Glass
- > Reference System: Ag / AgCl / Solid electrolyte
- > Process Connection: 3/4" NPT
- > Electrical Connection: Fixed cable 6 m
- > Temperature Sensor: Pt1000
- > Installation Depth: 26 mm
- > Potential Compensation: Yes

**Article No.: S24136114K**  
**Order Code: 209112104K06**

### Zirkon® pH Wide Body



### Measuring Parameter

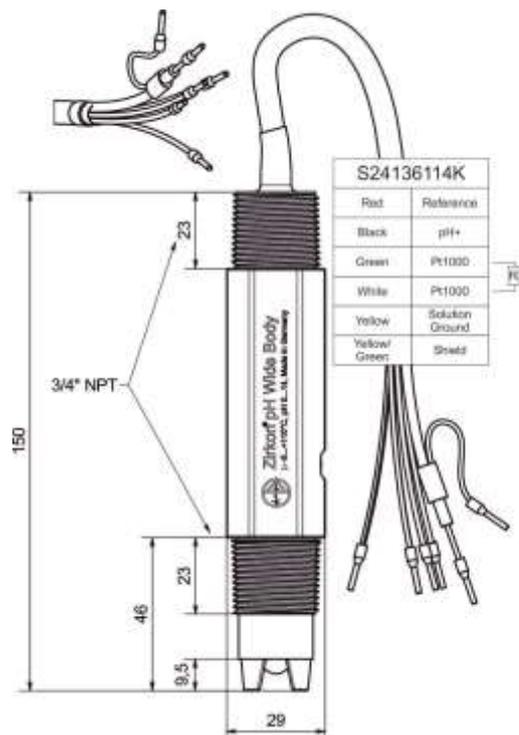



**Kuntze Instruments GmbH**

Robert-Bosch-Str. 7a  
40688 Meerbusch  
Germany

+49 2150 70660  
info@kuntze.com  
www.kuntze.com