

## Zirkon® Redox Process HT

Kuntze sensors stand for quality and are manufactured by our own production. Made in Germany.

Zirkon® Redox Process HT is a high temperature specialist can be used for professional applications, such as steriliation. The sensor is specially built to withstand aggressive media.

### Advantages

- > Thermally stable up to 135°C
- > Low maintenance due to gel filling
- > Suitable for aggressive media

### Measuring Parameter

- > Redox Potential (ORP): -1500.. +1500 mV

### Process Conditions


- > Max. Pressure: < 10 bar at 20 °C
- > Min. Conductivity: > 150 µS/cm
- > Temperature: -20...+135 °C

### Mechanical Construction

- > Junction: 1mm ceramic
- > Shaft Material: Glass
- > Shaft Length: 120 mm
- > Shaft Diameter: 12 mm
- > Electrode Material: Platinum plate
- > Reference System: Ag / AgCl / Solid electrolyte KCl 3 m
- > Process Connection: S8 Plug
- > Electrical Connection: 2 Poles
- > Temperature Sensor: None
- > Installation Depth: 120 mm
- > Potential Compensation: None

**Article No.: S24135313K**  
**Order Code: 218315900**

### Mechanical Drawing

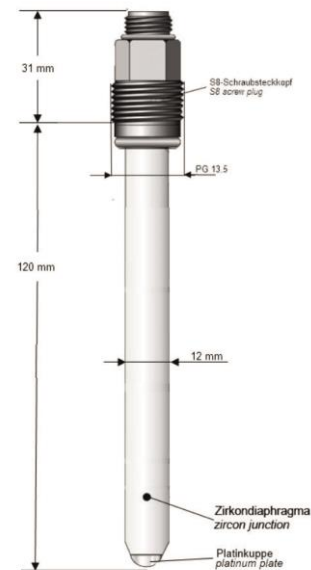



**Kuntze Instruments GmbH**  
Robert-Bosch-Str. 7a  
40688 Meerbusch  
Germany

+49 2150 70660  
[info@kuntze.com](mailto:info@kuntze.com)  
[www.kuntze.com](http://www.kuntze.com)