

## Zirkon® DIS

Kuntze sensors stand for quality and are manufactured by our own production. Made in Germany.

Zirkon® DIS is a potentiostatic sensor using an amperometric measurement. Measurement parameter and range are selected in the analyzer software.

### Advantages

- > Low maintenance due to gel filling
- > Stable zeropoint
- > High quality Zirkon junction for reliable measurement results

### Measuring Parameter

- > Free Chlorine:  
up to 1000 µg/l; up to 5,00 ; 10,00 ; 20,00 mg/l
- > Chlorine Dioxide:  
up to 1000 µg/l; up to 5,00 ; 10,00 ; 20,00 mg/l
- > Ozone:  
up to 1000 µg/l; up to 5,00 ; 10,00 ; 20,00 mg/l

### Process Conditions

- > Max. Pressure: < 10 bar at 20 °C
- > Min. Conductivity: > 150 µS/cm
- > Temperature: -5...+70 °C / 23...+158 °F

### Mechanical Construction

- > Junction: Zirkon
- > Shaft Material: Glass
- > Shaft Length: 80 mm
- > Shaft Diameter: 12 mm
- > Electrode Material: Gold Ring
- > Reference System: Ag / AgCl / Tepox Gel
- > Process Connection:  
S8 Plug (Swivel PG 13.5)
- > Electrical Connection: 2 Poles


**Article No.: S24135130K**

**Order Code: 231512110**

### Zirkon® DIS



### Mechanical Drawing

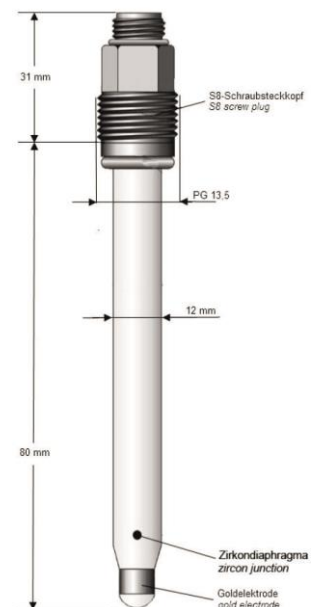



**Kuntze Instruments GmbH**  
Robert-Bosch-Str. 7a  
40688 Meerbusch  
Germany

+49 2150 70660  
[info@kuntze.com](mailto:info@kuntze.com)  
[www.kuntze.com](http://www.kuntze.com)